



An Empirical Analysis of Environmental Pollutants (Noise Pollution) on Building Construction Sites for determining the Real-Time Monitoring Indices

Viraat Engle¹

Hirendra Pratap Singh²

Rakesh Sakale³

¹Research Scholar, Department of Civil Engg., School of Research & Technology, People's University Bhopal (M.P.)

² Asst. Prof. Department of Civil Engg., School of Research & Technology, People's University Bhopal (M.P.)

³Prof. & HOD, Department of Civil Engg., School of Research & Technology, People's University Bhopal (M.P.)

ABSTRACT

The construction development sector has become one of the key causes of noise emissions. The growing working population, occupational health and safety effects, and declining profitability are the issues of the construction development sector. Chemical emissions generated from numerous construction activities and heavy machinery from construction building sites that are unacceptable to the human community.

As per the study, several big health questions are being questioned and the results given indicate the percentage of significant health conditions among employees. Issues such as mental exhaustion, irritability, focus, etc. that explicitly or implicitly influence the quality of function are often raised on a regular basis and the performance is given on the basis of the ranking. A rating chart is created from the information collected and the result obtained by these day-to-day problems. During this study, the primary emphasis was on the sound emissions generated by heavy machinery at the construction work site and its potential effect on the staff working at the site.

Key words: Large machinery, sound emissions, sound volume, vibration level, sound amplification, irritability.

INTRODUCTION

Noises (or impacts of sounds) are emitted by construction structures through sound sources



such as car or foot movement, knocking, or items crashing to the floor and can often be correlated with vibrations. The architecture strategies for reducing airborne and systemic noise are not exactly the same as those carried out in [1]. Construction development sites (i.e. where a number of contaminants such as noise, friction, and dust are generated from large building activities and heavy equipment) are important sources of environmental emissions. Construction development sites are a very important cause of noise emissions. Construction and demolition activity is often riotous and mostly takes place in rural areas (outside the city). The noise from the development of roads, residential streets and houses is a significant contributor to the metropolitan environment. Project noise features comprise pneumatic devices, air compressors, machine-mounted drum instruments, loaders, trucks and driving machines. The construction building sector adds greatly to emissions, is responsible for groundwater particulate matter and has a larger amount of loud grips per year. Over-noise is practically irritating and frustrating to humans, but it can contribute to hearing impairment, asthma, and heartbeat[2].

Sources of Noise Pollution

- Transport systems are the primary cause of noise emissions in metropolitan environments.
- Construction of homes, bridges, and roads creates a lot of disruption due to the usage of air compressors, military vehicles, trucks, dump trucks, and concrete breakers.
- Factory pollution also contributes to the current unhealthy degree of noise emissions.
- Loud noisy speakers, pumps, boilers, engines, air conditioners, ventilators, and vacuum cleaners contribute to current noise emissions as per the environmental conservation bureau

METHODOLOGY

. This projected research work was carried out by a case analysis. The case study was selected to allow the researcher to provide an in-depth understanding of the goals of the analysis. The structure and model used made it much easier to study the factors that influence environmental damage and pollution not only on the people present at the construction site but also on the local residents and individuals. In this research study, the M. P. Nagar (Bhopal, M.P.) construction development area is selected. Determine the main effect factors impacting noise at construction sites. Four big measures have been taken,

which are -

- Step 1 – The collection of data shall be carried out in the first phase with respect to the various devices and forms of machinery employed at the construction development site.
- Step 2 – Power stations and noise generated by them.
- Step 3 – Survey of the effect of noise on human safety.
- Step 4 – Survey of the accessibility of safety equipment.

Below figure: 1 shows the JCB Machine Equipment at Construction Site



Figure 1: JCB Machine Equipment at Construction Site

There have already been two different sorts of conditions impacting the climate around the construction development site. Noise production may be raised or minimized with the usage of a number of efficient machinery and even because of the climatic conditions. Information related to the various types of machines and the sound generated by them have been recorded and examined. Below table:1 illustrate the Average Noise Level Exposure by Trade, Activity and Equipment.

**Table: 1** Average Noise Level Exposure by Trade, Activity and Equipment

S.no.	Trade, Activity, or Equipment	Range (dBA)	Average (dBA)
1	Carpenter	82-94	90
2	Mason	84-97	91
3	Rebar Worker	91-97	95
4	Steel Stud Installer	85-104	96
5	Pneumatic Chipper/ Chisel	93-113	109
6	Compactor	91-110	108
8	Laborers – concrete pour	84-103	97
9	Electric drill	97-106	102
10	Dozers, Dumpers	89-103	96
11	Scrapers	84-102	97
12	Mobile Cranes	95-102	98
13	Man lift	102-104	103
14	Pavers	84-92	90
15	Pneumatic breakers	94-111	103
16	Hydraulic breakers	90-100	96
17	Pile drivers (diesel)	82-105	94

Below table: 2 expose the average noise level exposure by operator and task

Table:.2 Average Noise Level Exposure by Operator and Task



S.no.	Operator and Task	Range (dBA)	Average (dBA)
1	Heavy-duty bulldozer	91-107	97
2	Vibrating road roller	91-104	97
3	Light-duty bulldozer	93-101	96
4	Asphalt road roller	85-103	95
5	Wheel loader	87-100	94
6	Asphalt spreader	87-97	91
7	Light-duty Grader	88-91	89
8	Power shovel	80-93	88
9	Labourers	78-107	90
10	Crawler crane ,35 ton		
11	Rubber tired cane, 35 ton		
12	Truck-mounted crane	76-83	79
13	Tower crane	70-76	74

Table: 3 indicate the maximum noise levels for various appliances.

Table: 3 Equipment and their permissible noise

S.no.	Equipment	Noise levels
1	Tractor-scraper	93 dB
2	Rock drill	87 dB
3	Unmuffled concrete breaker	85 dB



4	Hand-held tree saw	82 dB
5	Large rotary diesel compressor	80 dB
6	1 ^{1/2} tonne dumper truck Diesel	75 dB
7	concrete mixer	75 dB

Every construction development site or sector are restricted by government and are set out in Table 4. Sound intensity exposures are dangerous to bare ears and are therefore monitored and controlled.

Table: 4 Permissible work hours as per the sound pressure level

S.no.	Total Time of Exposure (continuous or a number of short term exposures) per day (in hours)	Sound Pressure level (in dB)
1	8	90
2	4	93
3	2	96
4	1	99
5	1/2	102
6	1/8	108
7	1/16	111
8	1/32 (2 minutes or less)	114

Table 5 provides a description of the noise rates recorded at varying distances from the source of the disturbance, i.e. engines and generators.

Table 5 Noise in dBA from Generator sets



Distance from the Generator (m)	Noise Level, dBA		Distance from the Generator (m)	Noise Level, dBA	
	Generator G1	Generator G2		Generator G1	Generator G2
1	103.5	103.9	11	87.5	89.6
2	99.8	100.9	12	87.2	88.5
3	97.2	100.1	13	86.8	87.7
4	95.1	96.1	14	85.8	85.2
5	92.7	93.8	15	84.5	84.7
6	91.6	93.1	16	84.2	84.4
7	89.4	91.5	17	82.3	83.9
8	89	90.7	18	80.9	83.5
9	88.5	90.1	19	80.1	82.7
10	87.5	89.9	20	79.7	81.6

The research and investigation were administered at the construction development site of Habibganj Railway Station, India's first commercial, and world-class railway station. The research and review were sent to 86 staff, 75 of whom replied to the questions. Table: 6 describes the results of the problem description with regard to years of experience, class, and age.

Table: 6 Age group of the Respondents in Survey

S.no.	Age Group	Number of People
1	23-26	12
2	27-30	23



3	31-33	21
4	34-37	13
5	38-40	6
Total		75

Table 7 Experience of the Respondents in Construction Work

S.no.	Experience	Number of People
1	1 or < 1	17
2	1 – 2 (< 2)	24
3	2 – 4 (< 4)	16
4	4 – 5 (< 5)	14
5	> 5	4
Total		75

Table 8 Gender of the Respondents in Construction Work


S.no.	Gender	Number of People
1	Male	49
2	Female	26

RESULT

Focused on the noise level observed from the turbines and generators, the noise level was greater than 90 dBA. At 1.0 m from the transformer and engine; the values given are 103.5 dBA and 103.9 dBA for G1 and G2 separately. These quantities and assessments decrease with a rise in distance and hit the acceptable point of 90 dBA at 7 m for G1 and 10 m for G2 generator and engines. While the appropriate standard is 90 dBA, hearing loss occurs at a far lower point of around 84 decibels. This rate is taken at 15 m and 16 m for the generators G1




and G2 separately.

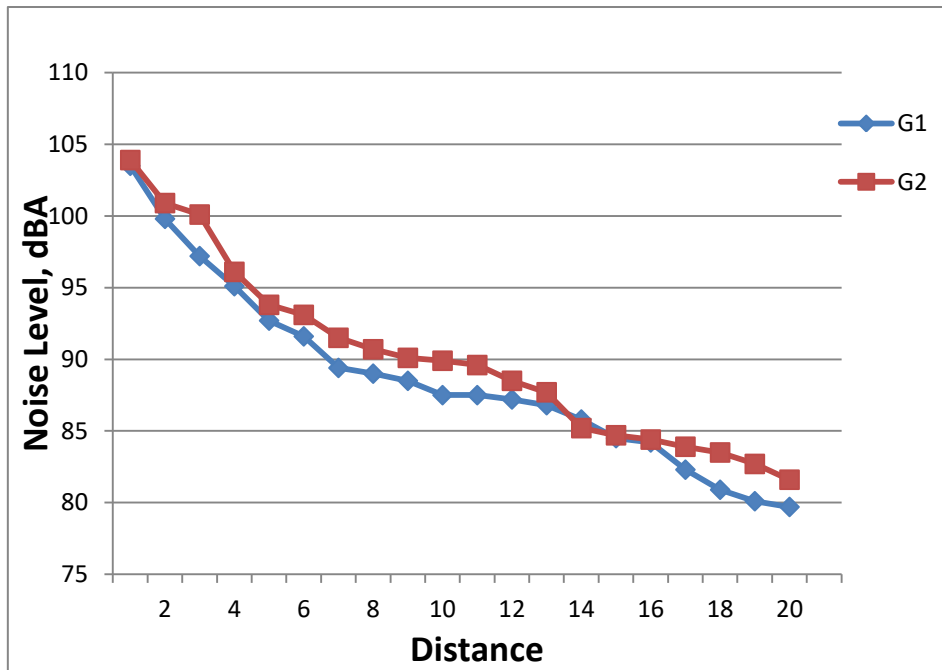

Graph.2: Noise level versus distance from generators

The association between the estimated noise level and the distance from the generator was seen in Graph.3.

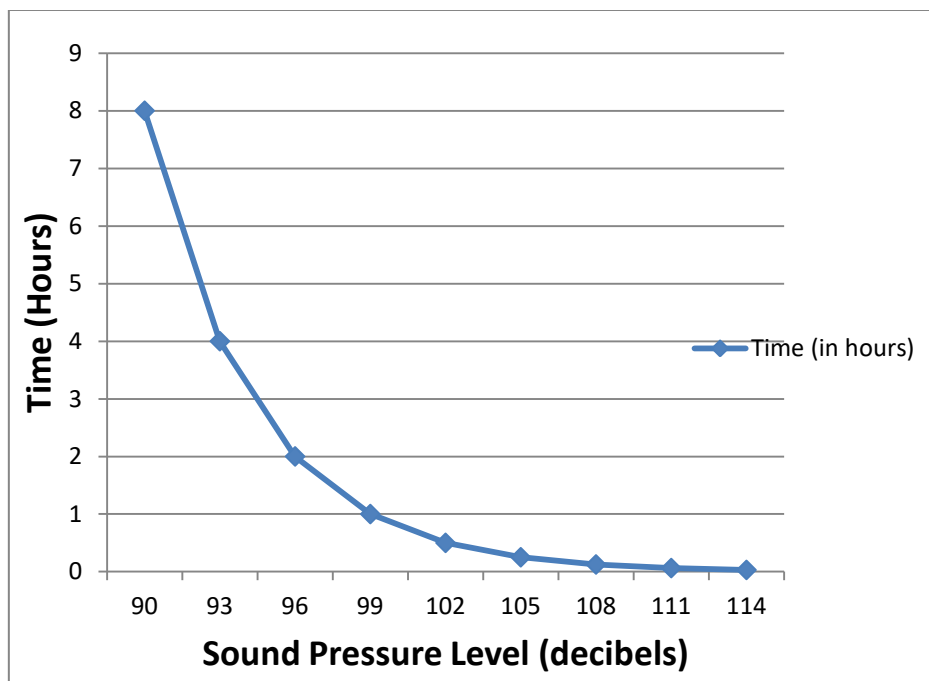

Graph 2: Total time of exposure vs. sound pressure level Graph



The maximum and total exposure period (continuous or a series of short-term exposures) in a day relies on the sound intensity level of the devices and equipment. The comparison of the change of sound intensity due to the reduction of the overall listening period is seen in Graph

CONCLUSION AND FUTURE SCOPE

The information obtained and collected from a number of tools and extracted after reviewing the literature was evaluated and examined. This work is conducted in two different parts. Only one of the topics deals with the relevant concerns regarding significant safety problems faced by employees and whether or not there is a requirement for personal protective equipment. The noise rate was higher than the 90 dBA standard permitted. At 1.0 m from the transformer and generators; the values given are 103.5 dBA and 103.9 dBA for G1 and G2 accordingly. Based on the most recent CPCB, and the information gathered and collected from the platform when the sound intensity level grows from 90 dB, the working hours are becoming less and less. As per the study and report, 46% of employees require earplugs after 90 dB sound, while 36% of employees require earplugs for 85 dB sound and 20% of workers and employees need earplugs for 70 dB sound. No staff was noticed in need of an ear plug at a sound intensity range of 50 dB. The study indicated that although about 40% of employees were unchanged and are not affected, the second-highest number of staff reported to have sleeping problems. The habit of communicating fast, then irritability, focus, performance, mental discomfort, and at least sleep disturbance.

REFERENCE

1. Li, Y. et al. (2020) ‘Construction and countermeasure discussion on government performance evaluation model of air pollution control: A case study from Beijing-Tianjin-Hebei region’, *Journal of Cleaner Production*. Elsevier B.V., 254. doi: 10.1016/j.jclepro.2020.120072.
2. Geetha.M, A. . (2015) ‘Study on impact of noise pollution at construction job site’, *International Journal of Latest Trends in Engineering and Technology*, 5(1), pp. 46–49.
3. A K, D. (2015) ‘NOISE POLLUTION – CAUSES, MITIGATION AND CONTROL MEASURES FOR ATTENUATION’, (March).
4. Ali, T. H. (2006) ‘Influence of National Culture on Construction Safety Climate in



Pakistan', (May).

5. Alvanchi, A. *et al.* (2020) 'Construction schedule, an influential factor on air pollution in urban infrastructure projects', *Journal of Cleaner Production*. Elsevier Ltd, 255, p. 120222. doi: 10.1016/j.jclepro.2020.120222.
6. Ballesteros, M. J. *et al.* (2010) 'Noise emission evolution on construction sites. Measurement for controlling and assessing its impact on the people and on the environment', *Building and Environment*, 45(3), pp. 711–717. doi: 10.1016/j.buildenv.2009.08.011.
7. Celik, T. and Budayan, C. (2016) 'How the Residents are Affected from Construction Operations Conducted in Residential Areas', *Procedia Engineering*. The Author(s), 161, pp. 394–398. doi: 10.1016/j.proeng.2016.08.580.
8. Chinchore, N. D. and Khare, P. P. R. (2014) 'Planning and Selection of Heavy Construction Equipment in Civil Engineering', 4(12), pp. 29–31.
9. Control Board, C. P. (2001) 'NOISE POLLUTION REGULATIONS IN INDIA', in.
10. Couto, J. P. and Couto, A. M. (no date) 'Construction sites environment management: establishing measures to mitigate the noise and waste impact'.